



Anywhere
INTELLIGENT CONNECTIVITY

X20 Dual 5GHz Anywhere Node ICA Technology



X20 is a high-performance dual 5 GHz radios wireless backhaul unit designed for flexible and expandable deployment regardless of physical constraints. Thanks to our Intelligent Connectivity Anywhere (ICA) technology, A-NN X20 extends connectivity to the locations where extensive fiber optic cabling is unfeasible due to a tight timescale.

The ICA technology breaks the traditional hopping limitation of wireless networks by tackling the multi-hop bandwidth degradation. With ICA technology, the X20 Anywhere Node supports over 10 hops and up to 600 Mbps world's leading end-to-end ring topology backhauling speed.



Ultra high throughput wireless surveillance backhauling

- Up to 600 Mbps throughput¹
 - IP 67 weatherproof

Greater than 10 hops backhauling

- 20/40/80 MHz channel
 - 2 x 5 GHz radio

Deployment Architecture

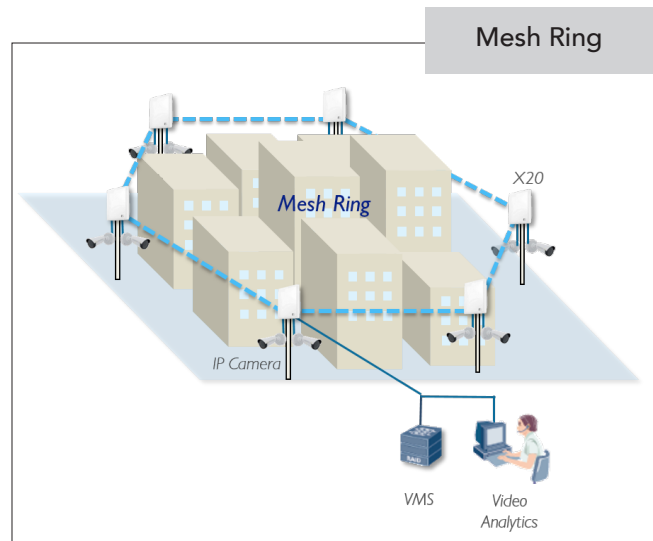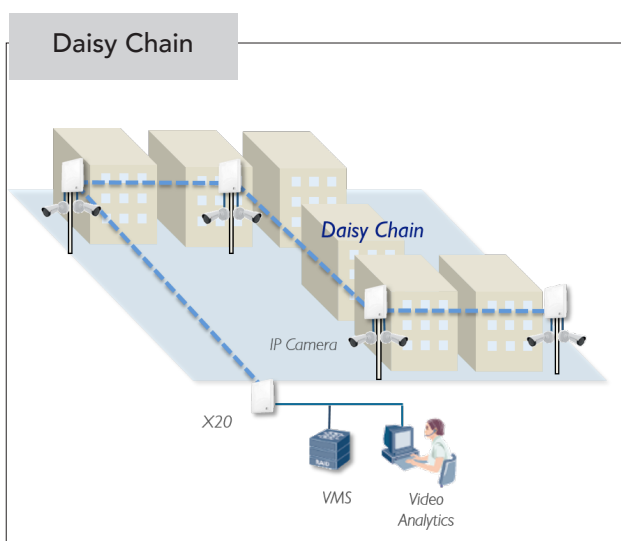

X20 Dual 5GHz MeshRanger

Specifications

Wireless

Operating Frequency (Country-dependent)	5.150 - 5.350 GHz 5.470 - 5.850 GHz
Modulation Techniques	OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM DSSS: DBPSK, DQPSK, CCK
No. of Spatial Stream	2x2: 2 MIMO, 20/40/80 MHz Channel
Receive Sensitivity	-91 dBm (20 MHz); -88 dBm (40 MHz); -85 dBm (80 MHz)
Transmit Power (Country-dependent)	27 dBm (Max.)

Antenna

Connected to	Radio 0	Radio 1
Type	Built-in 5 GHz	External 5 GHz
Gain	19 dBi	Optional Antennas: 5 GHz 19 dBi Panel; More Options on Request
Polarization	Vertical & Horizontal	
Horizontal Beamwidth	17°	
Vertical Beandwidth	17°	
VSWR	1.8 (Max.)	
Front-to-back Ratio	-25 dB (Min.)	
Isolation	35 dB (Min.)	

Networking

ICA Technology	Designed for Multi-hop High Throughput Wireless Surveillance and Backhauling
Topology	Daisy Chain, Mesh Ring
Redundancy	STP
Features	End-to-End Layer 2 Transparent, VLAN Trunking

Security

Mesh Link	2-tier Irreversible Key Generation Algorithm, Enhanced 3-factor (Mesh ID, Mesh Key and Static Key) Authentication Mechanism, MAC-based Access Control, Unique Per-link Packet Encryption
-----------	--

Authentication	Open System, Shared Key, WPA/WPA-PSK, WPA2/WPA2-PSK, 802.1x(EAP-PEAP/TLS/TTLS/SIM/AKA), MAC address
----------------	---

Encryption Protocol	TKIP, 128-bit AES
---------------------	-------------------

Management

Built-in Web User Interface Support	SmartMoment Remote Firmware Upgrade, SNMP v1/v2c, MIB support
-------------------------------------	--

Hardware

No. of Radio	2 x 5 GHz Radio
Network Interface	1xGE & PoE Port
LED	RUN; LAN; RADIO 0; RADIO 1
Power Supply	802.3at PoE Injector
Power Consumption	25 W (Max.)
Antenna Movement	0° to 30° Down-tilt (or 0° to 30° Up-tilt by Reversed Mounting)
MTBF	350,000 hours (50°C)

Physical Characteristics

Dimensions	270x270x80 mm (w/o Mounting)
Weight	1.86 kg (Net w/o Mounting); 2.39 kg (Net w/ Mounting); 2.66 kg (Gross)
Mounting	Pole Mounting (ø40 to ø52 mm)

Environmental

Temperature	-40°C to 65°C (Operating)
Humidity	5% to 95 % Non-condensing
Elevations	86 to 106 kPa
Wind Loading	265 km/h (Max.)
Weatherproof	IP67, 6 kV Common Mode Surge Protection

Certification

FCC, CE, RCM, OFCA

Warranty

First year free limited hardware warranty and firmware upgrade

Ordering Information

Part Number	Description
GE.AP-X200-00	X20 Dual 5GHz MeshRanger

Anywhere Networks reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

